

ENGLISH
ESPAÑOL

TRUPER®

Manual

Wet / dry vac with detachable blower


16 gal

Capacity

Applies for:

Code	Model
101522	ASP-16S

ASP-16S

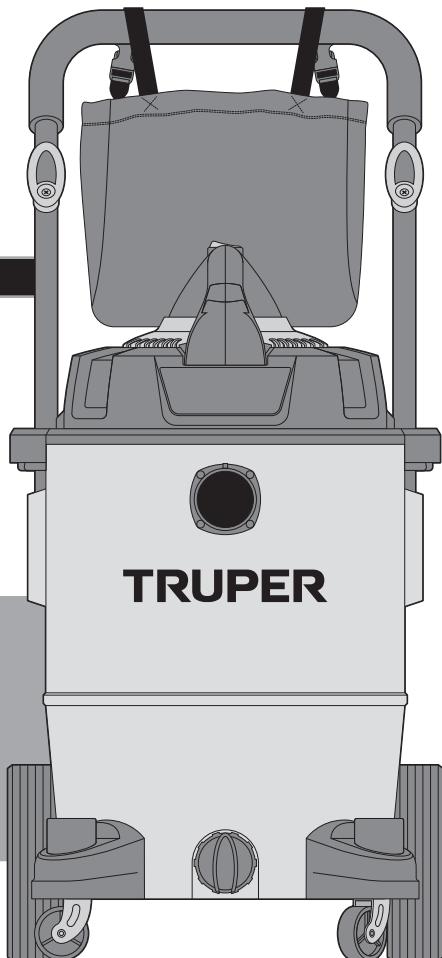

CAUTION



Read this manual thoroughly
before using the tool.

1
YEAR WARRANTY -
YEAR WARRANTY

Technical data.....	3
Power requirements.....	3
 General power tools safety warnings.....	4
 Safety warnings for vacuum cleaners	5
Parts	6
Assembly	7
Start up	8
Maintenance.....	9
Accessories and replacement parts.....	10
Troubleshooting.....	10
Authorized service centers.....	11
Warranty policy.....	12

CAUTION

To gain the best performance of the tool, prolong the duty life, make the Warranty valid if necessary, and to avoid hazards of fatal injuries please read and understand this Manual before using the tool.

Keep this manual for future references.

The illustrations in this manual are for reference only. They might be different from the real tool.

Use and care recommendations



RESPECT THE WORK CYCLES

50 min of work per 20 min of rest. Maximum 6 hours daily.



AVOID using the cord to move, lift or disconnect the tool.



Regular **FILTER CLEANING** is crucial to keeping the equipment performing well, preventing clogs, and protecting the motor from damage.

REPLACE IT IF IT'S BROKEN OR DAMAGED (refer to page 9, 10).

*We recommend using **TRUPER** replacement filters.



To **EXTEND** the life of your tool, use compressed air (blow) to clean it after each use.



Keep the tool's ventilation slots **CLEAN**.



Perform regular **MAINTENANCE** to your machine after each use (page 9).

ASP-16S

Code	•	101522
Description	•	Wet / dry vac with detachable blower
Voltage	•	127 V~
Frequency	•	60 Hz
Current	•	12 A
Maximum power	•	6.5 Hp
Rated power	•	2 Hp
Capacity	•	16 gal
Vacuuming pressure	•	1.8 PSI
Outflow pressure	•	2 PSI
Conductors	•	16 AWG x 2C with insulating temperature of 221 °F
Insulation	•	Class II
		IP Grade • IPX4

Power Cord Grips used in this product: Type "Y".

Tool Build Quality: Double insulation

Thermal insulation on motor winding: Class F

⚠ WARNING Avoid the risk of electric shock or severe injury. When the power cable gets damaged it should only be replaced by the manufacturer or at a TRUPER Authorized Service Center.


The build quality of the electric insulation is altered if spills or liquid gets into the tool while in use. Do not expose to rain, liquids and/or dampness.

⚠ WARNING Before gaining access to the terminals all power sources should be disconnected.



Power requirements

⚠ WARNING Tools with double insulation and reinforced insulation are equipped with a polarized plug (one prong is wider than the other). This plug will only fit in the right way into a polarized outlet. If the plug cannot be introduced into the outlet, reverse the plug. If it still doesn't fit, call a qualified electrician to install for you a polarized outlet. Do not alter the plug in any way. Both insulation types eliminate the need of both a grounded third power cord with three prongs or a grounded power connection.



⚠ WARNING When using an extension cable, verify the gauge is enough for the power that your product needs. A lower gauge cable will cause voltage drop in the line, resulting in power loss and overheating. The following table shows the right size to use depending on cable's length and the ampere capability shown in the tool's nameplate. When in doubt use the next higher gauge.

Ampere Capacity	Number of Conductors	Extension gauge from 5.9' to 49.2'	Extension gauge higher than 49.2'
from 0 A and up to 10 A		18 AWG (*)	16 AWG
from 10 A and up to 13 A		16 AWG	14 AWG
from 13 A and up to 15 A		14 AWG	12 AWG
from 15 A and up to 20 A	3 (one grounded)	8 AWG	6 AWG

* It is safe to use only if the extensions have a built-in artifact for over current protection.

AWG = American Wire Gauge. Reference: NMX-J-195-ANCE

⚠ WARNING When operating power tools outdoors, use a VOLTECK grounded extension cable labeled "For Outdoors Use". These extensions are especially designed for operating outdoors and reduce the risk of electric shock.

⚠ WARNING! Read carefully all safety warnings and instructions listed below. Failure to comply with any of these warnings may result in electric shock, fire and / or severe damage. **Save all warnings and instructions for future references.**

Work area

Keep your work area clean, and well lit.

Cluttered and dark areas may cause accidents.



Never use the tool in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.

Sparks generated by power tools may ignite the flammable material.



Keep children and bystanders at a safe distance while operating the tool.

Distractions may cause loss of control.



Electrical Safety

The tool plug must match the power outlet. Never modify the plug in any way. Do not use any adapter plugs with grounded power tools.

Modified plugs and different power outlets increase the risk of electric shock.



Avoid body contact with grounded surfaces, such as pipes, radiators, electric ranges and refrigerators.

The risk of electric shock increases if your body is grounded.

Do not expose the tool to rain or wet conditions.

Water entering into the tool increases the risk of electric shock.

Do not force the cord. Never use the cord to carry, lift or unplug the tool. Keep the cord away from heat, oil, sharp edges or moving parts.

Damaged or entangled cords increase the risk of electric shock.

When operating a tool outdoors, use an extension cord suitable for outdoor use.

Using an adequate outdoor extension cord reduces the risk of electric shock.

If operating the tool in a damp location cannot be avoided, use a ground fault circuit interrupter (GFCI) protected supply.

Using a GFCI reduces the risk of electric shock.

Personal safety

Stay alert, watch what you are doing and use common sense when operating a tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.

A moment of distraction while operating the tool may result in personal injury.

Use personal protective equipment. Always wear eye protection.

Protective equipment such as safety glasses, anti-dust mask, non-skid shoes, hard hats and hearing protection used in the right conditions significantly reduce personal injury.



Prevent unintentional starting up. Ensure the switch is in the "OFF" position before connecting into the power source and / or battery as well as when carrying the tool.

Transporting power tools with the finger on the switch or connecting power tools with the switch in the "ON" position may cause accidents.



This tool is in compliance with
the Official Mexican Standard
(NOM - Norma Oficial Mexicana).

Remove any wrench or vice before turning the power tool on.

Wrenches or vices left attached to rotating parts of the tool may result in personal injury.

Do not overreach. Keep proper footing and balance at all times.

This enables a better control on the tool during unexpected situations.

Dress properly. Do not wear loose clothing or jewelry. Keep hair, clothes and gloves away from the moving parts.

Loose clothes, jewelry or long hair may get caught in moving parts.



If you have dust extraction and recollection devices connected onto the tool, inspect their connections and use them correctly.

Using these devices reduce dust-related risks.

Power Tools Use and Care

Do not force the tool. Use the adequate tool for your application.

The correct tool delivers a better and safer job at the rate for which it was designed.



Do not use the tool if the switch is not working properly.

Any power tool that cannot be turned ON or OFF is dangerous and should be repaired before operating.

Disconnect the tool from the power source and / or battery before making any adjustments, changing accessories or storing.

These measures reduce the risk of accidentally starting the tool.

Store tools out of the reach of children. Do not allow persons that are not familiar with the tool or its instructions to operate the tool.

Power tools are dangerous in the hands of untrained users.



Service the tool. Check the mobile parts are not misaligned or stuck. There should not be broken parts or other conditions that may affect its operation. Repair any damage before using the tool.

Most accidents are caused due to poor maintenance to the tools.



Keep the cutting accessories sharp and clean.

Cutting accessories in good working conditions are less likely to bind and are easier to control.

Use the tool, components and accessories in accordance with these instructions and the projected way to use it for the type of tool when in adequate working conditions.

Using the tool for applications different from those it was designed for, could result in a hazardous situation.

Service

Repair the tool in a TRUPER Authorized Service Center using only identical spare parts.

This will ensure that the safety of the power tool is maintained.

Children or people with reduced physical, sensory or mental capabilities shall not operate the tool, neither inexperienced people or without knowledge in the use of the tool, unless supervised by a person responsible of their safety or if receiving previous instructions about the tool operation.

Children shall be kept under supervision to double-check they will not play with the tool. Tight supervision shall be used with children or disabled persons to prevent them from using or being close to any household tool.



Safety warnings for vacuum cleaners

TRUPER

Dangerous materials

⚠ WARNING • Do not vacuum or use the vacuum cleaner near flammable liquids, gases or explosive fumes such as gasoline or other types of fuel, lighter fluid, hot liquids, cleaners, oil-based paint, natural gas, hydrogen or explosive dust such as coal dust, magnesium dust, grain dust or gunpowder. Sparks inside the motor can ignite flammable vapors or dust.

⚠ WARNING • Do not vacuum any burning or smoke-producing materials like cigarettes, matches or hot ashes.

⚠ CAUTION • To reduce the risk of damage to health, do not vacuum toxic materials.
• Do not vacuum masonry dust or soot from the chimney, as it is a very fine dust and will not be trapped by the filter, which may cause damage to the motor. When vacuuming fine dust use a special dust filter (sold separately).

Power Cable

• Do not pull or carry the vacuum cleaner by the cord; do not use the cord around sharp edges or corners.
• Keep cord away from hot surfaces.
• Do not unplug the vacuum cleaner by pulling on the cord: To unplug, grasp the plug, not the cord.
• Do not use the vacuum cleaner if the power cord or plug is in bad repair.
• Do not pass the vacuum cleaner over the power cord.
• Do not pick up the plug or vacuum cleaner with wet hands.
• To reduce the risk of injury due to accidental starting, unplug the power cord before changing or cleaning the filter.

Blowing

• Direct the air discharge only in the working areas.
• Do not use the vacuum cleaner as a sprayer.
• Do not blow air at people and animals.
• Keep children away when using as a blower.
• Use safety goggles.




Unpacking



• Push in the two latches while lifting the container lid handles to open the vacuum cleaner.
• Remove all accessories from inside the container.
• The dry vacuum cartridge filter (A) is factory installed.
⚠ CAUTION Remember to use the vacuum cleaner with one of the filters installed otherwise the motor will be damaged and the warranty will be void.

While operating the vacuum cleaner

⚠ CAUTION • Keep hair, loose clothing, fingers and any other body parts away from openings and moving parts.

- Do not use or store near hazardous materials.
- Do not leave the vacuum cleaner running unattended.
- Do not leave the vacuum cleaner unattended when it is plugged into the power source.
- Do not install any objects over the ventilation openings.
- Do not operate the vacuum cleaner with blocked vents; keep them free of dust, lint, hair or anything that reduces air flow.
- Do not operate the vacuum cleaner with a broken filter or without the filter installed, except when vacuuming liquids as described in the operation section of this instruction manual.
- To reduce the risk of falls, use extreme caution when cleaning stairs.
- If the vacuum is not working properly: missing parts, dropped or damaged, left outdoors or dropped in water, take it to a TRUPER Authorized Service Center.
- Turn off the vacuum cleaner before unplugging it.
- Unplug from outlet when not in use or before servicing.
- Do not allow to be used as a toy. Particular care should be taken when used by children or when they are nearby.
- Do not expose the vacuum cleaner to rain. Store indoors.
- Use ear protectors when performing services that make noises in excess of 85 dB

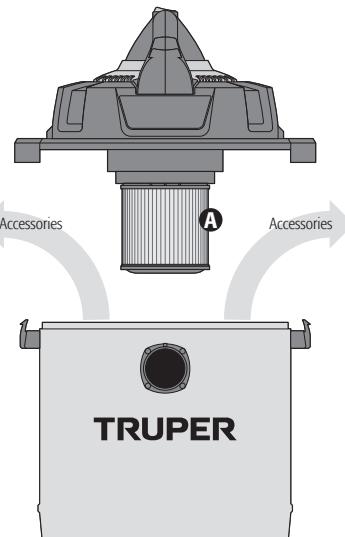

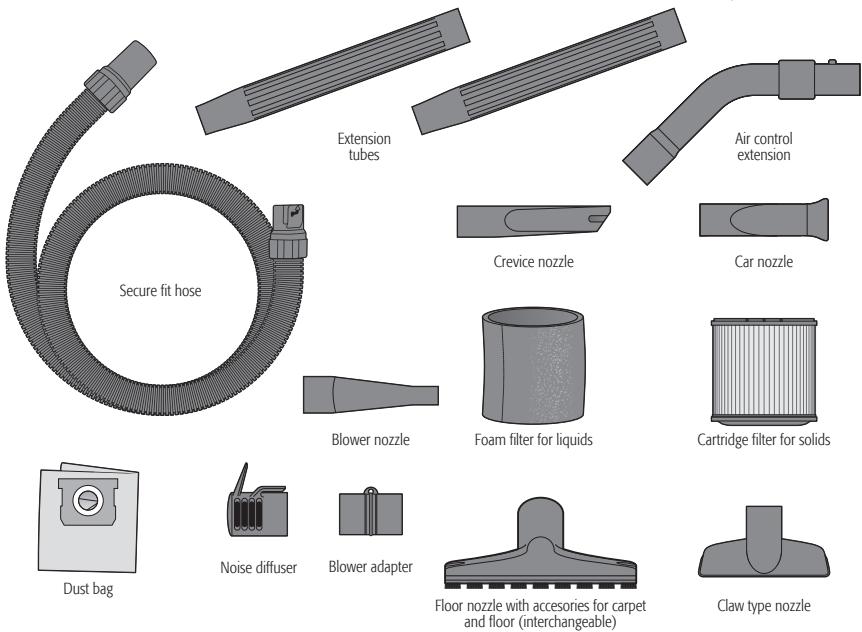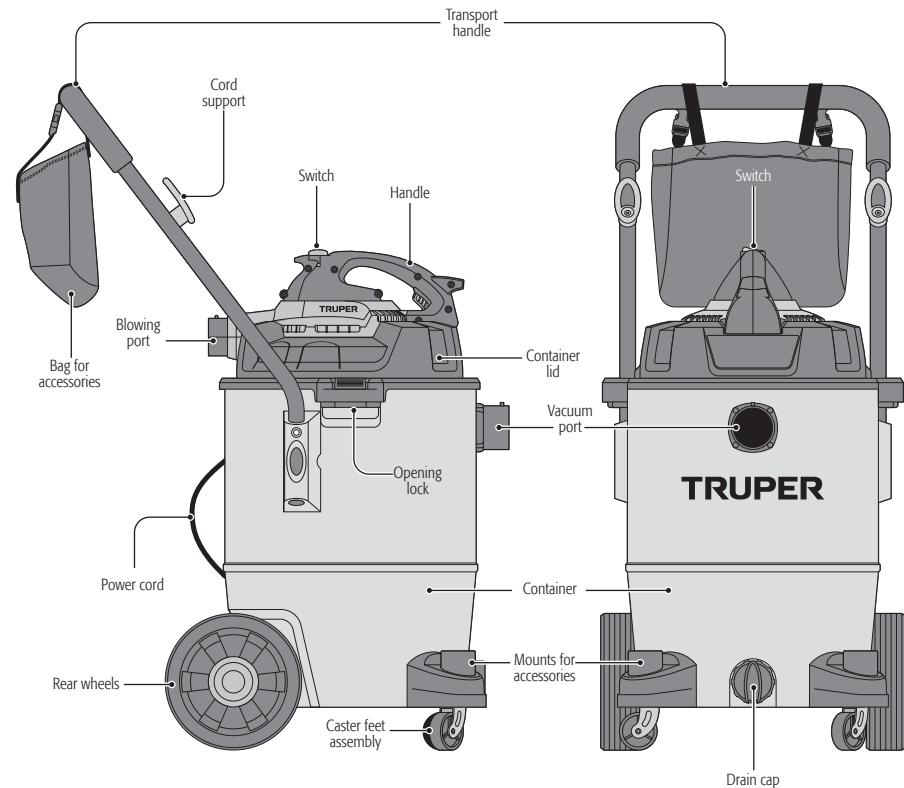





Assembly

TRUPER



- Pull out and from below the two latches to open the vacuum cleaner and remove the container lid.
- Assemble the rear casters assembly (B) as shown. Secure the axle, washers and casters by inserting the retaining latches (C¹) on both sides of the shaft. Push the plugs (C²) until they are secure.
- Turn the container (D) upside down and install the two front casters (E) and the rear casters assembly into their respective mounts on the base of the container with the included screws. Rotate the container again to support the casters on the floor.
- Re-install the motor cover on the container until the latches click.
- Install the transport handle on the two side mounts (F) by inserting its ends through the respective holes until the knobs (G) are secured.
- Install the fasteners (H) by inserting the carriage bolts into the back of the handle and threading each into its fastener. Make sure they face the same direction.
- Install the cartridge filter or foam filter depending on the material to be vacuumed (see page 8 and 9).

CAUTION Remember to use the vacuum cleaner with one of these filters installed, otherwise the motor will be damaged and the warranty will be void.

- In case of vacuuming powders, fix the tab (I) of the collection bag inside the vacuum port taking care not to damage the bag.

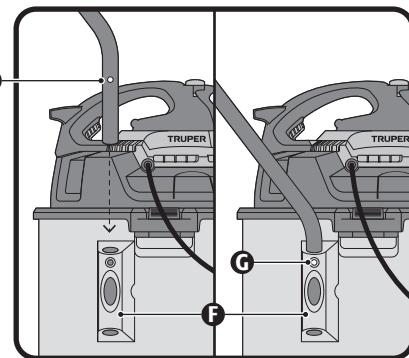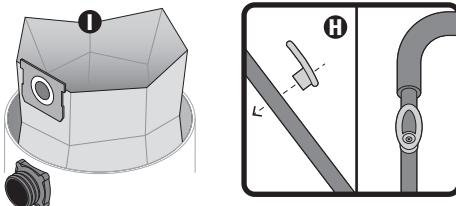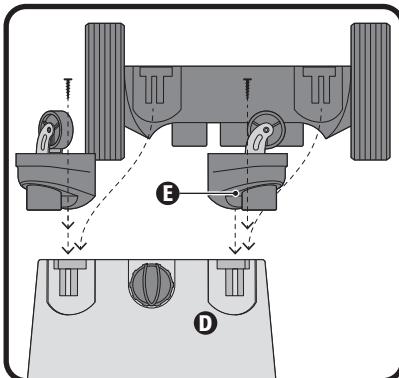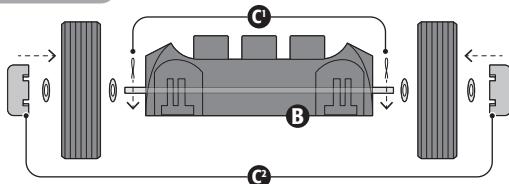

- Insert the hose into the vacuum port and twist it clockwise to secure it in place (J).
- If necessary, connect one or more extension tubes to the free end of the hose.
- Choose the appropriate nozzle and connect it to the free end of the hose or, if necessary, to the extension tube (K).
- For quiet operation during vacuuming work install the noise diffuser in the blow-off port and turn it clockwise to secure it in place (L).

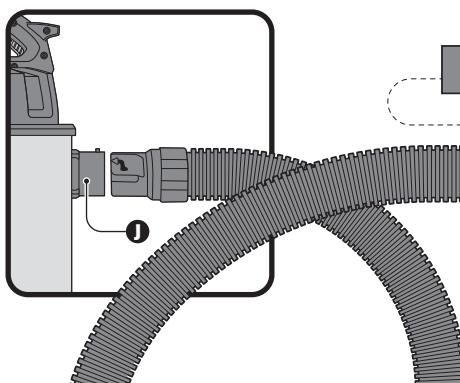

Switching on and off


- To turn the vacuum cleaner on, plug the power cord into the electrical outlet.
- Install the switch in the on position "I" (ON).
- To turn the vacuum cleaner off, install the switch in the "O" (OFF) position, and disconnect the power cord from the outlet.

CAUTION • Always check that the switch is in the off position before connecting the power cord to the outlet.

Blowing

WARNING • Read, understand and follow the safety warnings on page 5.

- Press the blower release button (A) to detach the blower from the container lid (B).
- Remove the noise diffuser (C) from the blower and attach the adapter (D) in its place.
- Connect the blower nozzle to the adapter. If required, an extension tube can be connected between the nozzle and the adapter.
- Turn on the blower.

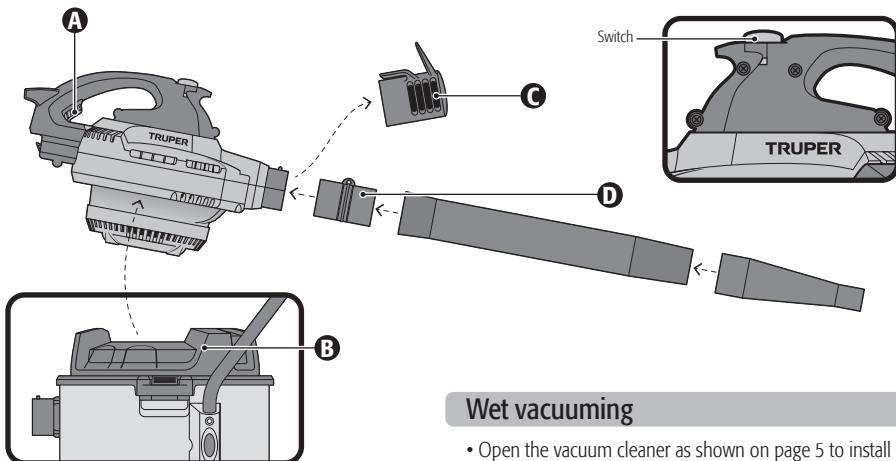

Wet vacuuming

- Open the vacuum cleaner as shown on page 5 to install the foam filter for wet vacuuming.
- Turn the motor cover upside down and install the filter in the filter cage (M) as shown in the picture. Then install the motor cover in place.

WARNING • Do not vacuum or work near toxic, flammable or explosive materials as indicated in the safety warnings on page 5.


CAUTION • Do not use the dry vacuum cloth filter for vacuuming liquids.

CAUTION • When vacuuming large quantities of liquids, do not immerse the nozzle completely in the liquid; leave a gap at the tip of the nozzle opening to allow air flow. The machine is designed with a float valve that stops the suction drive when the container reaches its maximum capacity. You will notice an increase in motor speed. When this happens, turn the machine off, unplug the power cord from the outlet, open the vacuum and empty the liquid from the container into a receptacle or drain.

• When the vacuuming job is complete, open the drain plug (N) to empty the container, clean and dry the inside. Remove the foam filter, install the cartridge filter in its place and close the drain plug before storing the vacuum cleaner.

Dry vacuuming

- Open the vacuum cleaner as shown on page 5 to verify that the dry vacuum filter is properly installed.
- If not, install the filter in the filter cage (M) as shown. Then install the motor cover in place.
- WARNING** • Do not vacuum or work near toxic, flammable or explosive materials as indicated in the safety warnings on page 5.
- CAUTION** • For dry vacuuming do not use the foam filter for wet vacuuming.
- At the end of the vacuuming job empty the container before storing the vacuum cleaner.

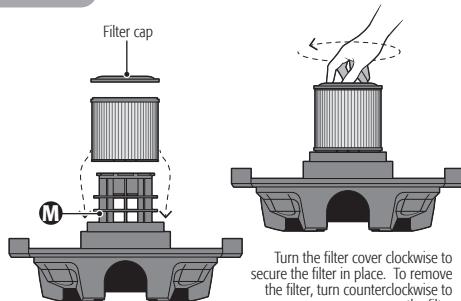

Turn the filter cover clockwise to secure the filter in place. To remove the filter, turn counterclockwise to remove the filter


Maintenance

- It is recommended to take the equipment for maintenance once a year for component inspection, such as carbon brushes, bearings, etc.

Sponge pad

- After using the blower, examine the ventilation slots at the bottom. Remove any debris or particles that have lodged in them.
- To clean the sponge pad inside the blower:
 1. Loosen the four screws on the bottom cover to remove it and gain access to the sponge pad.
 2. Remove the pad, clean it with soapy water and allow it to dry.
 3. Install the clean pad in place by aligning the four holes with the screw sockets.
 4. Install the cover with its four screws on the blower.

CAUTION Check the bearing before reuse. In case of damage, go to a TRUPER Authorized Service Center for replacement.



Cleaning

- Always keep the vents clean and free of obstructions to ensure proper engine cooling.
- Regularly inspect all mounting screws and make sure they are tightened properly. In case any of the screws is loose, tighten it immediately


Carbon brush replacement

- The carbons should be checked periodically, and always be replaced by a TRUPER Authorized Service Center when they have worn out.
- After they have been replaced, ask to inspect if the new carbons can move freely in the carbon holder and request that the tool be turned on for 5 minutes to match the contact of the carbons and commutator.
- Only genuine TRUPER replacement carbons, specifically designed with the proper hardness and electrical resistance for each type of motor, should be used. Out of specification carbons may damage the motor.
- When changing carbons, always replace both carbons. Regular filter cleaning or replacement is crucial for maintaining optimal performance, preventing clogs, and avoiding motor damage.

Replace the filter if it shows cracks, deformations, or excessive wear.

Service

- Tools should only be serviced at a TRUPER Authorized Service Center. Service and maintenance by unqualified persons can be dangerous and may result in personal injury and void the product warranty.




Cleaning or replacing the cartridge filter (for solids)

- Pull the latches (A) outward and remove the motor cover.
- Turn the filter cap (B) counterclockwise to remove it.
- Remove the cartridge filter for dry vacuuming (factory-installed).
- Dust off the filter with compressed air after each use.
- Place the clean or new filter in the basket.
- Turn the filter cap clockwise to secure it.
- Reinstall the motor cover.

Cleaning or replacing the foam filter (for liquids)

- Ensure the vacuum is switched off and unplugged from the power source.
- Pull the latches (**A**) outward to remove the motor cover.
- Take out the foam filter (**C**) used for liquid vacuuming.
- Shake and wash the filter with water and mild soap. Allow it to dry before reinstalling.
- Place the clean or new filter in the basket and reinstall the motor cover.



We recommend using TRUPER replacement filters.

Accessories and replacement parts

List of available accessories and replacement parts

Component	Code	Item	Description
	11103	MAN-ASPI-G2	12 and 16-gal vacuum hose
	12086	TU-ASPI-G2	12 and 16-gal vacuum extension wand
	12085	FILC-ASPI-G1	Paper cartridge filter (for solids)
	19295	FILC-AS-8X-16X	Polyester cartridge filter (for solids)
	12087	FILF-ASPI-12-16	Fine dust cartridge filter (for solids)
	12081	FILE-ASPI-G2	Foam filter (for liquids)
	12080	FIL-ASPI-G2	Cloth filter (for solids)
	11101	FILP-ASPI-G2	Dust bag

Troubleshooting

Problem

Cause

Solution

The vacuum cleaner is not working.

- No power.
- Defective cable.
- The container is full.

- Check the power supply, cable, circuit switches, fuses.
- Unplug and check the electric cable. If damaged, have it repaired in a TRUPER Authorized Service Center.
- Empty the container.

Dust comes out of the motor cover.

- The filter cartridge is not set or is damaged.

- Set or replace the cartridge filter.

Reduced motor efficiency and vibration / speed.

- There is a blockage in the nozzle, hose or container inlet.
- The filter cartridge is clogged due to the presence of fine dust.

- Check nozzle, hose and container inlet for blockage.
- Remove the filter and clean it or install a new one.

Authorized service centers

TRUPER

In the event of any problem contacting a TRUPER Authorized Service Center, please see our webpage WWW.TRUPER.COM to get an updated list, or call our toll-free numbers 800 690-6990 or 800-018-7873 to get information about the nearest Service Center.

AGUASCALIENTES	DE TODO PARA LA CONSTRUCCIÓN GRAL. BARRAGÁN #1201, COL. GREMIAL, C.P. 20030, AGUASCALIENTES, AGS. TEL.: 449 994 0537	
BAJA CALIFORNIA	SUCURSAL TIJUANA AV. LA ENCANTADA, LOTE #5, PARQUE INDUSTRIAL EL FLORIDO II, C.P. 22244, TIJUANA, B.C. TEL.: 664 969 5100	
BAJA CALIFORNIA SUR	FIX FERRETERÍAS FELIPE ÁNGELES ESQ. RUIZ CORTÍNEZ S/N, COL. PUEBLO NUEVO, C.P. 23670, CD. CONSTITUCIÓN, B.C.S. TEL.: 613 132 1115	
CAMPECHE	TORNILLERÍA Y FERRETERÍA AAA AV. ÁLVARO OBREGÓN #524, COL. ESPERANZA C.P. 24080 CAMPECHE, CAMP. TEL.: 981 815 2808	
CHIAPAS	FIX FERRETERÍAS AV. CENTRAL SUR #27, COL. CENTRO, C.P. 30700, TAPACHULA, CHIS. TEL.: 962 118 4083	
CHIHUAHUA	SUCURSAL CHIHUAHUA AV. SILVESTRE TERRAZAS #128-11, PARQUE INDUSTRIAL BAFAR, CARRETERA MÉXICO CUAUHTÉMOC, C.P. 31415, CHIHUAHUA, CHIH. TEL.: 614 434 0052	
CIUDAD DE MÉXICO	FIX FERRETERÍAS EL MONSTRUO DE CORREGIDORA, CORREGIDORA # 35, COL. CENTRO, C.P. 06060, CUAUHTÉMOC, CDMX. TEL.: 55 5522 5031 / 5522 4861	
COAHUILA	SUCURSAL TORREÓN CALLE METAL MECÁNICA #280, PARQUE INDUSTRIAL ORIENTE, C.P. 27278, TORREÓN, COAH. TEL.: 871 209 68 23	
COLIMA	BOMBAS Y MOTORES BYMTESA DE MANZANILLO BLVD. MIGUEL DE LA MADRID #190, COL. 16 DE SEPTIEMBRE, C.P. 28239, MANZANILLO, COL. TEL.: 314 332 1986 / 332 8013	
DURANGO	TORNILLOS ÁGUILA, S.A. DE C.V. MAZURIO #200, COL. LUIS ECHEVERRÍA, DURANGO, DGO.TEL.: 618 817 1946 / 618 818 2844	
ESTADO DE MÉXICO	SUCURSAL CENTRO JILOTEPEC PARQUE INDUSTRIAL # 1, COL. PARQUE INDUSTRIAL JILOTEPEC, JILOTEPEC, EDO. DE MÉX. C.P. 54257 TEL.: 761 782 9101 EXT. 5728 / 5102	
GUANAJUATO	CIA. FERRETERA NUEVO MUNDO S.A. DE C.V. AV. MÉXICO - JAPÓN #225, CD. INDUSTRIAL, C.P. 38010, CELAYA, GTO. TEL.: 461 617 7578 / 79 / 80 / 88	
GUERRERO	CENTRO DE SERVICIO ECLIPSE CALLE PRINCIPAL MZ.1 LT. 1, COL. SANTA FE, C.P. 39010, CHILPANCINGO, GRO. TEL.: 747 478 5793	
HIDALGO	FERREPRECIOS S.A. DE C.V. LIBERTAD ORIENTE #304 LOCAL 30, INTERIOR DE PASAJE ROBLEDO, COL. CENTRO, C.P. 43600, TULANCINGO, HGO. TEL.: 775 753 6615 / 775 753 6616	
JALISCO	SUCURSAL GUADALAJARA AV. ADOLEFO B. HORN # 6800, COL: SANTA CRUZ DEL VALLE, C.P.: 45655, TLAJOMULCO DE ZÚNIGA, JAL. TEL.: 33 3600 5285 AL 90	
MICHOACÁN	FIX FERRETERÍAS AV. PASEO DE LA REPÚBLICA #3140-A, COL. EX-HACIENDA DE LA HUERTA, C.P. 58050, MORELIA, MICH. TEL.: 443 334 6858	
MORELOS	FIX FERRETERÍAS CAPITÁN ANZURES #95, ESQ. JOSÉ PERDIZ, COL. CENTRO, C.P. 62740, CUAUTLA, MOR. TEL.: 735 352 8931	
NAYARIT	HERRAMIENTAS DE TEPIC MAZATLÁN #117, COL. CENTRO, C.P. 63000, TEPIC, NAY. TEL.: 311 258 0540	
NUEVO LEÓN	SUCURSAL MONTERREY CARRETERA LAREDO #300, 1B MONTERREY PARKS, COLONIA PUERTA DE ANÁHUAC, C.P. 66052, ESCOBEDO, NUEVO LEÓN, TEL.: 81 8352 8791 / 81 8352 8790	
OAXACA	FIX FERRETERÍAS AV. 20 DE NOVIEMBRE #910, COL. CENTRO, C.P. 68300, TUXTEPEC, OAX. TEL.: 287 106 5092	
PUEBLA	SUCURSAL PUEBLA AV. PERIFÉRICO #2-A, SAN LORENZO ALMECATLA, C.P. 72710, CUAUTLACINGO, PUE. TEL.: 222 282 8282 / 84 / 85 / 86	
QUERÉTARO	ARU HERRAMIENTAS S.A. DE C.V. AV. PUERTO DE VERACRUZ #110, COL. RANCHO DE ENMEDIO, C.P. 76842, SAN JUAN DEL RÍO, QRO. TEL.: 427 268 4544	
QUINTANA ROO	FIX FERRETERÍAS CARRETERA FEDERAL MZ. 46 LT. 3 LOCAL 2, COL EJIDAL, C.P. 77100 PLAYA DEL CARMEN, Q.R. TEL.: 984 267 3140	
SAN LUIS POTOSÍ	FIX FERRETERÍAS AV. UNIVERSIDAD #1850, COL. EL PASEO, C.P. 78320, SAN LUIS POTOSÍ, SLP. TEL.: 444 822 4341	
SINALOA	SUCURSAL CULIACÁN AV. JESÚS KUMATE SUR #4301, COL. HACIENDA DE LA MORA, C.P. 80143, CULIACÁN, SIN. TEL.: 667 173 9139 / 173 8400	
SONORA	FIX FERRETERÍAS CALLE 5 DE FEBRERO #517, SUR LT. 25 MZ. 10, COL. CENTRO, C.P. 85000, CD. OBREGÓN, SON. TEL.: 644 413 2392	
TABASCO	SUCURSAL VILLAHERMOSA CALLE HELIO LOTES 1, 2 Y 3 MZ. #1, COL. INDUSTRIAL, 2A ETAPA, C.P. 86010, VILLAHERMOSA, TAB. TEL.: 993 353 7244	
TAMAULIPAS	VM ORINGS Y REFACCIONES CALLE ROSITA #527 ENTRE 20 DE NOVIEMBRE Y GRAL. RODRÍGUEZ, FRACC. REYNOSA, C.P. 88780, REYNOSA, TAMS. TEL.: 899 926 7552	
TLAXCALA	SERVICIOS Y HERRAMIENTAS INDUSTRIALES PABLO SIDAR #132, COL. BARRIO DE SAN BARTOLOMÉ, C.P. 90970, SAN PABLO DEL MONTE, TLAX. TEL.: 222 271 7502	
VERACRUZ	LA CASA DISTRIBUIDORA TRUPER BLVD. PRIMAVERA ESQ. HORTENSIA S/N, COL. PRIMAVERA, C.P. 93308, POZA RICA, VER. TEL.: 782 823 8100 / 826 8484	
YUCATÁN	SUCURSAL MÉRIDA CALLE 33 #600 Y 602, LOCALIDAD ITZINCAB Y MULSAY, MPIO. UMÁN, C.P. 97390, MÉRIDA, YUC. TEL.: 999 912 2451	

Code	Model	Brand
101522	ASP-16S	TRUPER

Warranty. Duration: 1 year. Coverage: parts, components and workmanship against manufacturing or operating defects, except if used under conditions other than normal; when it was not operated in accordance with the instructive; was altered or repaired by personnel not authorized by TRUPER®. To make the warranty valid, present the product, stamped policy or invoice or receipt or voucher, in the establishment where you bought it or in Corregidora 35, Centro, Cuauhtémoc, CDMX, 06060, where you can also purchase parts, components, consumables and accessories. It includes the costs of transportation of the product that derive from its fulfillment of its service network. Phone number 800-018-7873. Made in Vietnam. Imported by TRUPER, S.A. de C.V. Parque Industrial 1, Parque Industrial Jilotepec, Jilotepec, Edo. de Méx. C.P. 54257, Phone number 761 782 9100.

Stamp of the business. Delivery date:

