

Front



Luminario de sobreponer
LED

46862
VAP-001L

LEA LAS SIGUIENTES INSTRUCCIONES DE USO

CONSERVE ESTE INSTRUCTIVO

Usted necesitará el instructivo para checar las reglas de seguridad y precaución, instrucciones de mantenimiento y operación.

INSTRUCCIONES DE SEGURIDAD:

- El trabajo eléctrico debe ser realizado por una persona calificada.
- Nunca toque el luminario cuando se encuentre encendido.
- En caso de que el luminario falle, desconecte del suministro de energía. No intente reparar el luminario usted mismo.
- Los trabajos de reparación deben ser realizados en un Centro de Servicio Autorizado Truper en sucursal.

ESPECIFICACIONES

120 V ~ - 240 V ~ 60 Hz 360 mA - 160 mA 36 W máx.
Tipo de fuente de luz: LED x 200
Flujo luminoso: 3 800 lm
Eficiencia: 105 lm/W
IP65
Deseable instalar en techo montado o suspendido.


1. Perfore los agujeros en la superficie de montaje e introduzca en ellos los taquetes plásticos. El espacio entre los agujeros se muestra en la tabla de dimensiones.




Dimensiones (mm)			
A	B ¹⁾	C ²⁾	D
1 200	85	78	810

¹⁾ Dimensiones sin clips
²⁾ Dimensiones sin los soportes de montaje


2. Los soportes de montaje se deben instalar con tornillos.



3. Abra el difusor del luminario desbloqueando los clips y retire la placa de montaje con los módulos de LED. Fije el cuerpo del luminario encajando los soportes de montaje en él. Inserte el cable eléctrico en el cuerpo del luminario a través del orificio para el cable. Conecte los cables al bloque de terminales en el cuerpo del luminario.

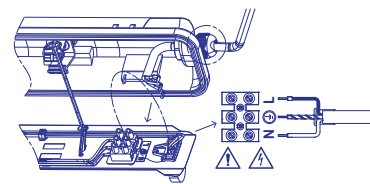

4. Monte la placa de montaje en el cuerpo de la luminaria. Coloque el difusor de la luminaria y asegúrelo con los clips.



Importado por **Truper, S.A. de C.V.** Parque Industrial 1, Parque Industrial Jilotepec, Jilotepec, Edo. de Méx. C.P. 54257 Hecho en China, Tel.: 76 1782 9100. www.truper.com 06-2023

Back



Light fixture
LED

46862
VAP-001L

READ THE FOLLOWING INSTRUCTIONS FOR USE

SAVE THIS INSTRUCTION

You will need the instructions to check the safety and precaution rules, maintenance and operating instructions.

SECURITY INSTRUCTIONS:

- Electrical work must be done by a qualified person.
- Never touch the lighting when it is on.
- In case the lighting fails, disconnect from the power supply. Do not try to repair the lighting yourself.
- Repair work must be performed at a Truper Authorized Branch Service Center.

TECHNICAL PARAMETER

120 V ~ - 240 V ~ 60 Hz 360 mA - 160 mA 36 W max.
Light source type: LED x 200
Luminous flux: 3 800 lm
Efficiency: 105 lm / W
IP65
Desirable to install on a mounted or suspended ceiling.


1. Drill the holes in the mounting surface and insert the plastic anchors into them. The spacing between the holes is shown in the dimension table.




Dimensiones (mm)			
A	B ¹⁾	C ²⁾	D
1 200	85	78	810

¹⁾ Dimensiones sin clips
²⁾ Dimensiones sin los soportes de montaje


2. The mounting brackets must be installed with screws.



3. Open the light diffuser by unlocking the clips and remove the mounting plate with the LED modules. Attach the fixture body by snapping the mounting brackets onto it. Insert the electrical wire into the fixture body through the wire hole. Connect the wires to the terminal block on the fixture body.

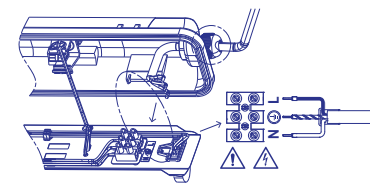

4. Mount the mounting plate on the fixture body. Attach the diffuser to the fixture and secure it with the clips.



Imported by **Truper, S.A. de C.V.** Parque Industrial 1, Parque Industrial Jilotepec, Jilotepec, Edo. de Méx. C.P. 54257 Made in China, Tel.: 76 1782 9100. www.truper.com 06-2023

TECHNICAL DATA

Packaging: **Instructive**

Dimensions: **14 x 21.5 cm**

PANTONE Blue 072 C

INKS & die cuts

CUT-LINE
(Do not print)

IMAGES / LINKS

ARTWORK SET
Confidential Information
TRUPER®

SOFTWARE: Illustrator CC
MAC & PC Platform compatible