


Manual

# Gravity feed spray gun

30 PSI - 50 PSI  
Air Pressure

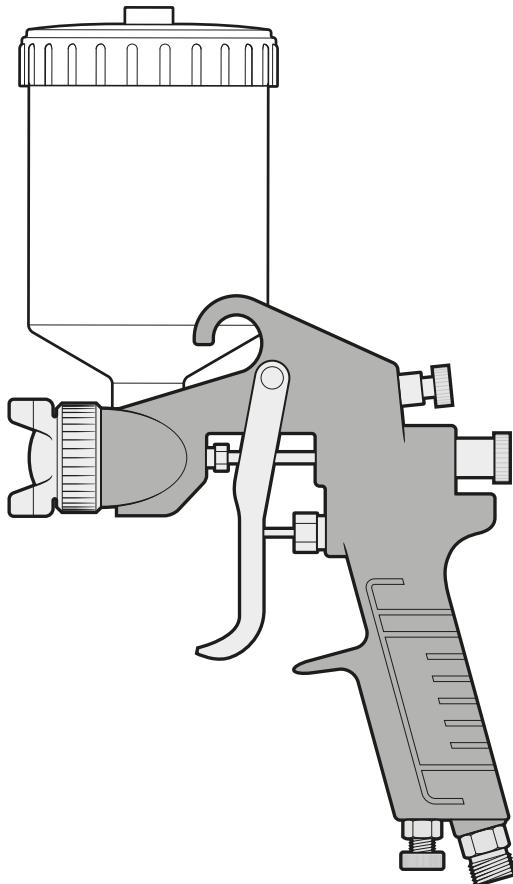

**CAUTION**



Read this manual thoroughly  
before using the tool.

Technical data .....	2
Pneumatic requirements .....	2
 Safety warnings for the use of pneumatic tools .....	3
 Safety Warnings for the use of gravity feed spray guns .....	4
Parts .....	5
Preparation .....	6
Startup .....	7
Maintenance .....	8
Troubleshooting .....	9
Notes .....	10

## CAUTION

To gain the best performance of the tool, prolong the duty life, make the Warranty valid if necessary, and to avoid hazards of fatal injuries please read and understand this Manual before using the tool.

Keep this manual for future references.

The illustrations in this manual are for reference only. They might be different from the real tool.



## Technical Data

Description	•	Gravity feed spray gun
Jar Capacity	•	13.5 oz
Air Pressure	•	30 PSI – 50 PSI
Connection Diameter	•	1/4-18 NPT
Air Consumption	•	6 CFM
Nozzle Diameter	•	0.05"

## Pneumatic Requirements

- For household jobs, it is possible to use 1,5 CV compressors with a 25 liters' deposit. For more demanding jobs, like bodywork, industry, etc, we recommend using 3 CV compressors with a 100-liter deposit as minimum.
- Use high-pressure hoses with the adequate length to do the job comfortably.

 **CAUTION** • Dust and water condensation inside the compressor tank can cause a deficient finish in the surface to be painted. To prevent that possibility, install a regulating filter between the compressor and the gun.

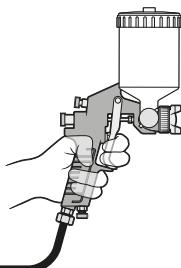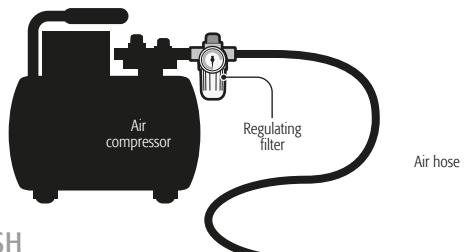

# General power tools safety warnings

**PRETUL**



Keep your work area clean, tidy and well lit.

**CAUTION** Cluttered and dark areas may cause accidents.



Never use the tool in explosive environments  
or near flammable liquids.



**DANGER** Sparks generated by the tool may cause explosion or fire.

Keep children and visitors at a safe distance  
when using the tool.

**WARNING** Distractions may cause losing control  
and cause accidents.



Avoid contact with power lines and circuits.

**DANGER** Find and avoid both power lines and circuits,  
especially hidden wires and grounded devices.



Stay alert, use care and common sense.

**CAUTION** Do not rely on your knowledge of the tool.  
Do not get distracted while operating it.  
It could cause accidents.



Do not use the tool when tired or under the influence of  
drugs, alcohol or medication.

**DANGER** One second of distraction while using the tool  
may cause severe injuries.



Use the tool with guards and protective devices in place  
and in good working conditions.

**WARNING** Failure to comply with these measures may cause  
severe injuries.



Secure and support the work piece properly.

**CAUTION** Use bench vices and a stable working area.



Do not force the tool.

**CAUTION** It will do the job better and safer at the rate  
for which it was intended.



Store the tool in a safe place away from the reach of  
children.

**WARNING** Power tools are dangerous for inexperienced  
people.



Dress properly.

**WARNING** Loose clothing, jewelry or long hair may get  
caught in moving parts.



Keep your hands away from rotating and/or mobile  
parts.

**WARNING** Failure to comply with this safety measure  
exposes you to severe personal injury.



Use adequate personal protection.

**CAUTION** Using safety glasses, anti-dust mask, safety non-skid  
shoes, helmet and earplugs used in adequate conditions  
considerably reduce the risk of injury.



Disconnect the air hose from the tool servicing,  
changing devices or storing.

**WARNING** Reduce the risk of unintentional starting causing  
accidents.



Never use a tool if the switch is not working or is not  
properly assembled.

**WARNING** You are exposed to severe personal injury.



Do not overreach.

**CAUTION** Good footing and balance allow you to gain better  
control of the tool in unexpected situations.



Never pull the air hose.

**WARNING** Do not use it to carry or disconnect the tool pulling out  
the air supply. Damaged or tangled hoses can burst  
and shoot residues towards the operator.



Avoid accidental startup.

**WARNING** Make sure the air supply tool is switched off  
before connecting or moving the tool.



Remove vices before starting the tool.

**DANGER** Additional tools or vices set into a moving part  
may cause severe injury.



Service the tool and verify it is in excellent working  
conditions.

**CAUTION** Carefully check all moving parts, alignment and  
assembly. Make this periodically. Look for damaged or  
malfunctioning parts to immediately be repaired.



Accessories.

**CAUTION** Use only accessories or spare parts recommended in  
this MANUAL or certified by TRUPER



Never leave a running tool unattended.

**CAUTION** Switch off and disconnect the tool from the air supply  
after operating and before putting it aside. Avoid  
severe injury.



### Substances and materials

**⚠ CAUTION** • The unit is designed to apply covering materials like paint, varnish, enamel, etc. These should have an ignition point not lower than 70 °F. Check the product can label or container.

**⚠ WARNING** • Do not spray substances you are not familiar with and if their potential danger is unknown to you.

**⚠ WARNING** • Do not spray flammable substances.  
• Use care with dangers originated by the sprayed substances. Read the text and information in the cans and containers or the manufacturer specifications.

### Before operating the unit

**⚠ CAUTION** • The unit shall not be used in enclosed areas or explosive environments.

• If working outdoors consider wind direction. Wind carries the covering to great distances, causes damages and makes the job difficult.

**⚠ CAUTION** • If working indoors, verify there is adequate ventilation.

**⚠ WARNING** • The work area shall be free of any ignition source. Do not smoke while spraying or near the work area.

**⚠ CAUTION** • Wear a face mask and safety goggles when spraying. Prevents damaging lungs and eyes.

• Wearing gloves and an overall is recommended to protect hands and clothes from the product when applying.

### While operating the device

**⚠ CAUTION** • Never point the sprayer towards your body, passersby or animals.


• Make sure that the equipment does not absorb any steam solvent.

**⚠ CAUTION** • In the event you need to pause during the application process, do not set the sprayer sideways. Hold it by the hook or somewhere for it to be vertical.

### After operating the unit

**⚠ WARNING** • When finishing the job clean the gun perfectly to eliminate any product residue. Accumulations can damage the gun and cancel the Warranty



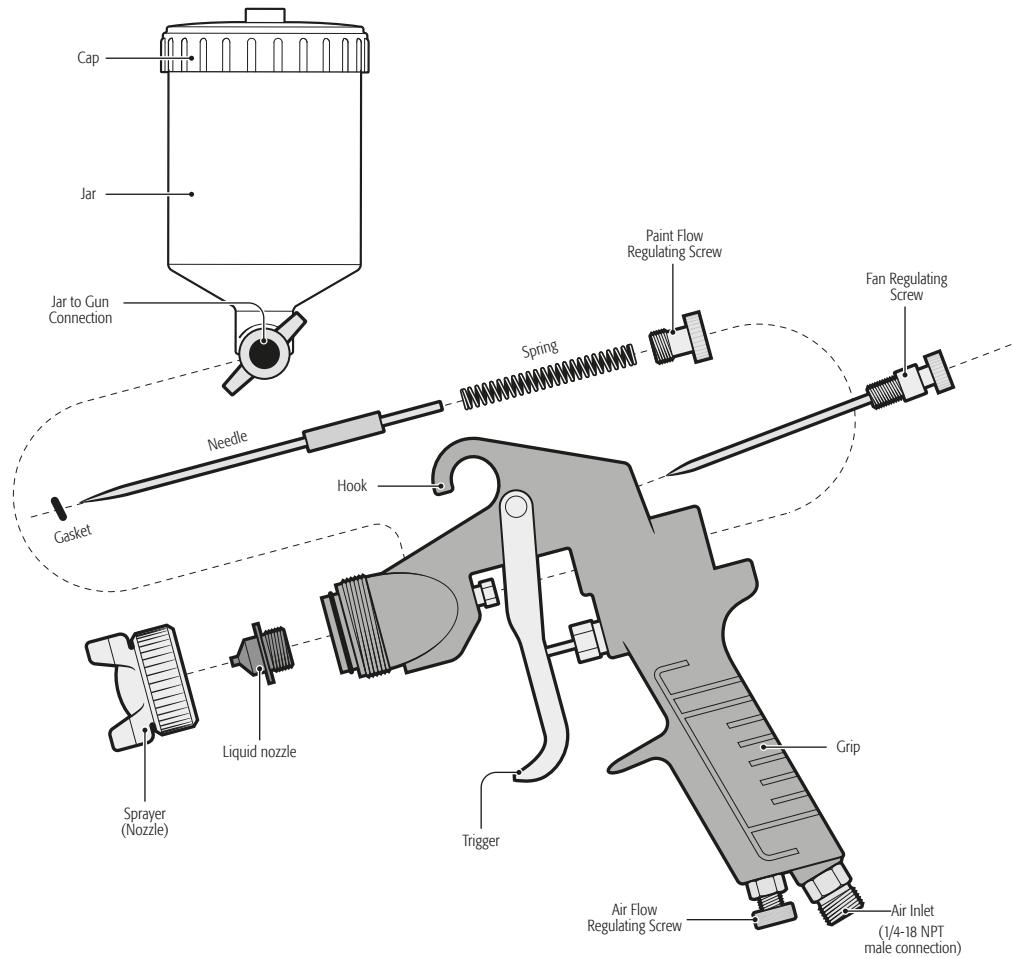


- Preparing the surface to be sprayed is important to carry out a good job. Thin the paint or product to gain the right viscosity before applying.
- Double check always the surface to be sprayed is free of dust, dirt or grease.
- Make sure to cover with adhesive tape, some newspaper and/or plastic those areas that do not require spraying.
- Paint or product to be sprayed shall be mixed perfectly before filling the jar to prevent settling and make them lump-free.
- Before buying the product read the manufacturer recommendations.

## Thinning the material

- Most paints are sold ready to be used with a brush. They need to be thinned before applying with a paint gun. Follow the manufacturer's instructions to correctly thin the material.
- Adding a thinner is recommended. Add 5% to 10% until reaching the right viscosity to apply the material.
- Use the din 4 viscosity flow cup (not included) to determine the paint right viscosity. Viscosity is determined by counting the seconds it takes for the material to be discharged into the measuring glass. The following table shows the recommended times for different products.


Product	Second to discharge
Water based Paint	20 - 25
Primer	24 - 28
Varnish	20 - 25
Oil Based Paint	18 - 22
Enamel Paint	18 - 22
Aluminum Paint	22 - 25
Automotive Sealant	25 - 35
Wood Sealant	28 - 35
Wood Preserver	Thinning is not Required
Wood Stain	

- If after thinning the product the dispersion capacity is too low add thinner. Add slowly from 5 to 10 % until the dispersion capacity meets your needs.
- If the paint is too thick, the painted surface will be too rough (orange peel). If the paint is too liquid, there is risk of dripping.

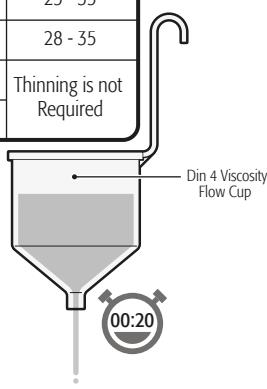

## Filling the Jar

- Unscrew the paint gun jar to fill up with paint. Close the cap to prevent spilling.
- The jar can easily be filled up during the paint process.
- The jar shall not be tilted more than 30° from the vertical to assure a continuous paint flow (A).
- In the event the job requires tilting the gun more than 30° you can adjust the jar to compensate the vertical and keep the paint flow running (B).

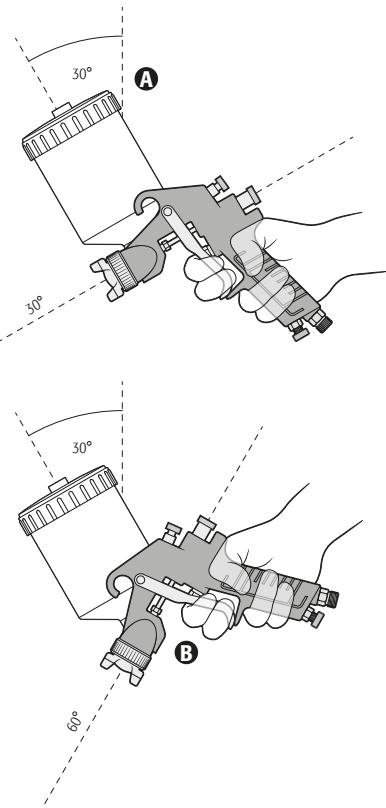


## Adjusts

**CAUTION** • During the adjusting process and before applying the paint onto the work surface make some tests on scrap material until gaining the adequate paint flow.

- Turn the adjusting screw (**A**) in a counterclockwise direction to increase the volume of the material to be sprayed.
- Turn the adjusting screw in a clockwise direction to diminish the volume of the material to be sprayed.
- Turn the adjusting screw (**B**) to modify the fan pattern needed to apply the paint.
- Turn the adjusting screw (**C**) to modify the air flow needed to apply paint.
- Turn the sprayer (**D**) to determine the angle to apply the spray pattern.





## Turning on

- Turn on the compressor.
- Press the trigger (**E**) to open the air flow and start suctioning the product from the jar. Aim the gun against a piece of cardboard until the spraying starts.
- Release the trigger to stop the spraying flow.

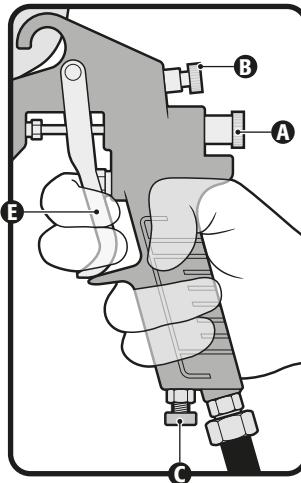

## Spraying Techniques

- To gain best results keep the gun always parallel to the surface (**F**). Keep the nozzle 7.8" - 12" from the surface and spray in an even manner from one side to the other and upwards and downwards. Do not spray in an angle with regards to the surface. Pass softly and evenly. When spraying on large areas use the crossed pattern (**G**).
- Displace the gun using uniform and constant speed. Fast movements produce thin layers and slow movements, produce thick layers.
- Apply one layer at a time. If another layer is needed see the drying recommendations in the manufacturer product before applying a second layer. Keep in mind that to gain a better finish applying two thin layers is always better than one thick layer.
- When spraying small areas turn the adjusting screw to reduce the volume of material to be applied. This is helpful to use less paint and prevents from over-spraying.
- To assure applying evenly avoid pausing while spraying an object when possible.

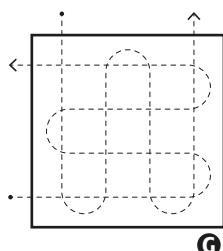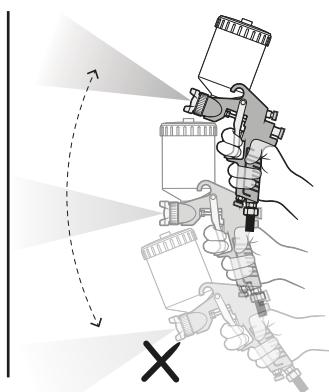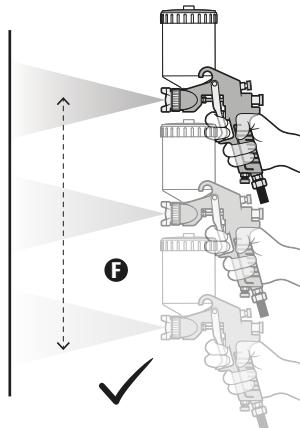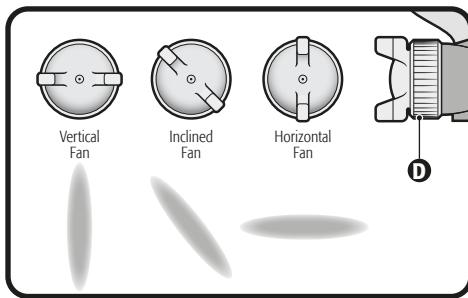

## Cleaning and Care


- It is very important to clean the paint gun thoroughly after each use.
- WARNING** Inadequate cleansing will result in malfunctioning and will cancel the Warranty.
- Without removing the jar press the trigger to remove all the product inside the system.
- Pour the remaining material into an adequate container.
- Disconnect the paint gun hose.
- Clean the jar, the gasket seal and the suction pipe thoroughly with a rag soaked with the solvent that is right for the product.
- Disassemble the regulator, the sprayer, the nozzle and the needle. Clean them with a brush and solvent.
- Clean the paint gun body with a piece of rag moistened with solvent.

**CAUTION** Do not immerse the gun in solvent. The gaskets may get damaged.

- When the parts are clean assemble back the paint gun.
- Pour a small amount of solvent into the jar. Connect the hose to the paint gun.
- Turn on the compressor and spray into a container until getting clean solvent out through the nozzle.

## Needle Seal

- Use special care adjusting the needle seal. This is important to get a better job.
- Using the wrench adjust the needle seal (A).
- Check the seal often to assure it is not damaged. To gain access to the seal, remove the needle and remove the seal pressing part (B).

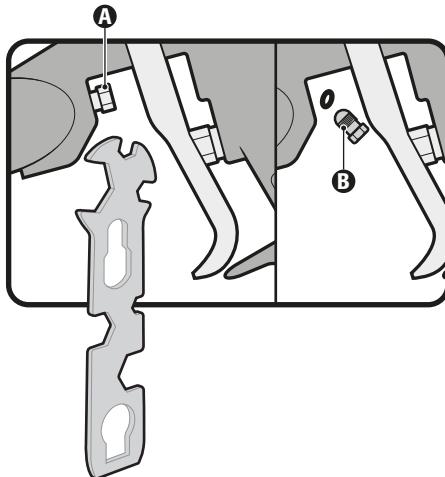



Right Mist Pattern

## Problem

Wrong Spraying Pattern:

- Half Moon

- Leaning

- Divided

- Centered

## Cause

- Paint build up in the nozzle.

- Paint build up in the nozzle or sprayer.
- Damaged nozzle.
- Nozzle wrongly tightened.

- Paint viscosity is too poor.
- Fluid outlet is too high.

- Paint viscosity is too high.
- Fluid outlet is too low.

## Solution

- Remove the obstructions from the nozzle.

**CAUTION** Do not use metal objects to clean the funnel orifices.

- Remove the obstructions from the nozzle and sprayer.
- Replace nozzle.
- Tighten the nozzle.

- Add paint to the mix.
- Adjust the paint flow regulator or the air flow.

- Add thinner to the mix.
- Adjust the paint flow regulator or the air flow.



Right Fan

## Problem

Wrong Fan:

- Fluctuation

- Divided

## Cause

- Air enters between the nozzle and the gun body.
- Air is suctioned through the needle seal gasket.

- Nozzle and needle are not correctly set.
- Damaged nozzle and/or needle.
- Paint build up inside the gun system.

## Solution

- Clean the nozzle and the gun joint. If damaged, replace the nozzle.
- Tighten the needle seal as indicated in page 8.

- Clean the nozzle and needle.

- Replace the fluids nozzle and the fluids needle.
- Disassemble the gun parts and clean all the components.

Air leaks.

- Residues or damage in the air flow regulating screw. Components are not correctly tightened.

- Disassemble the system to check, clean and tighten the air valve, its seat and washers. Replace any damaged part.

Paint leaks.


- Residues or damage in the nozzle and / or needle. Components are not correctly tightened.

- Disassemble the system to check, clean and tighten the nozzle, needle its seat and washers. Replace any damaged part.

Paint is not flowing.

- Regulating paint flow screw is not open enough.
- There is obstruction in the system.

- Turn the screw in a counterclockwise direction to increase the flow.
- Disassemble the gun parts and clean all its components.

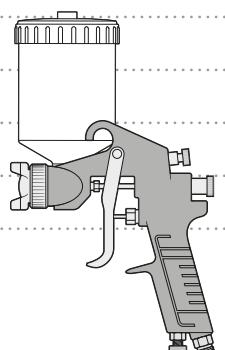

Importado por TRUPER, S.A. de C.V. Parque Industrial 1,  
Parque Industrial Jilotepec, Jilotepec, Edo. de Méx.  
C.P. 54257 Made in/Hecho en China,  
Tel.: 76 1782 9100. WWW.TRUPER.COM  
06-2025